

INTRODUCTION

AMCO BEST


TAFE Power Source and BB Battery, China, world leaders in power storage technology and solutions, has entered into a long-term partnership to manufacture par excellence batteries under the brand name AMCO BEST to cater to the entire South Asian countries. AMCO BEST VRLA battery has high power density, low self-discharge and gives high performance while still being economical to use.

TAFE Power Source, being a group company of conglomerate major The Amalgamations Group, has evolved from being a modest battery manufacturer to an integrated next generation power storage solutions provider. TAFE Power Source has one of the most advanced and extensive manufacturing facilities in the country, the strong R&D and unique product development capabilities enables us to roll out world-class power solutions at the right time to market.


SPECIFICATIONS

Model	Voltage (V)	Nominal Capacity (AH)				Weight Kg	Terminal		Dimension(mm)				MAX Discharge Current For 5 Sec	MAX Charge Current (A)
		20hr	10hr	5hr	3hr		Type	Posi	L	W	H	TH		
BP 1.2-6	6	1.20	1.14	1.02	0.90	0.30	T1	2	97	25	51	56	18.00	0.36
BP 3-6	6	3.00	2.85	2.55	2.25	2.25	T1	2	134	34	60	66	45.00	0.90
BP 4.5-6	6	4.50	4.28	3.83	3.38	0.91	T1	1	70	48	102	107	67.50	1.35
BP 10-6	6	10.00	9.50	8.50	7.50	2.00	T1	2	151	50	94	100	150.00	3.00
BP 1.2-12	12	1.20	1.14	1.02	0.90	0.59	T1	4	97	45	53	59	18.00	0.36
BP 2.3-12	12	2.30	2.19	1.96	1.73	0.94	T1	2	178	34	60	65	34.50	0.69
BP 3.6-12	12	3.60	3.42	3.06	2.70	1.32	T1	4	134	67	60	66	54.00	1.08
BP 4.5-12	12	4.50	4.28	3.83	3.38	1.84	T1	3	90	70	102	106	67.50	1.35
BP 7.2-12	12	7.20	7.13	6.38	5.63	2.65	T2	5	151	65	94	100	112.20	2.25
BP 12-12	12	12.00	1.40	10.20	9.00	4.03	T2	5	151	98	94	98	180.00	3.60
BP 17-12	12	17.00	16.15	14.45	12.75	6.15	B1	7	181	76	166	166	255.00	5.10
BP 28-12	12	28.00	26.60	23.80	21.00	9.60	B1	7	175	166	125	125	420.00	8.40
BP 40-12	12	40.00	38.00	34.00	30.00	14.30	B2	7	197	165	171	171	600.00	12.00
BP 65-12	12	65.00	61.75	55.25	48.75	24.50	B2-2	14	350	166	174	174	650.00	19.50
BP 100-12	12	100.00	85.50	76.50	67.50	33.50	B3	14	329	172	215	238	900.00	27.00
BP 120-12	12	120.00	114.00	102.00	90.00	39.50	B4	8	407	173	210	239	1200.00	36.00
BP 160-12	12	160.00	152.00	136.00	120.00	51.20	B9	8	483	171	240	240	1600.00	48.00
BP 230-12	12	230.00	218.00	195.50	172.50	72.50	B9	13	522	240	216	240	2300.00	69.00

TERMINAL TYPE MM (INCH)

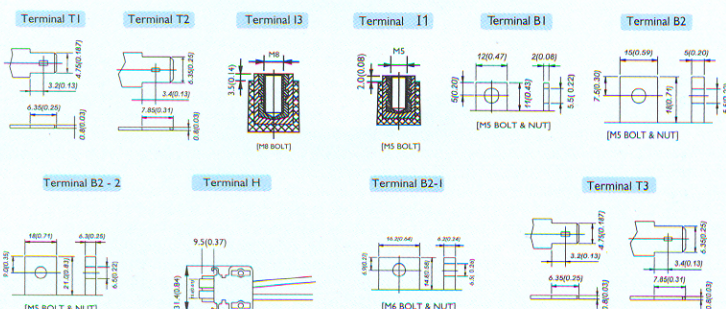

TERMINAL POSITION

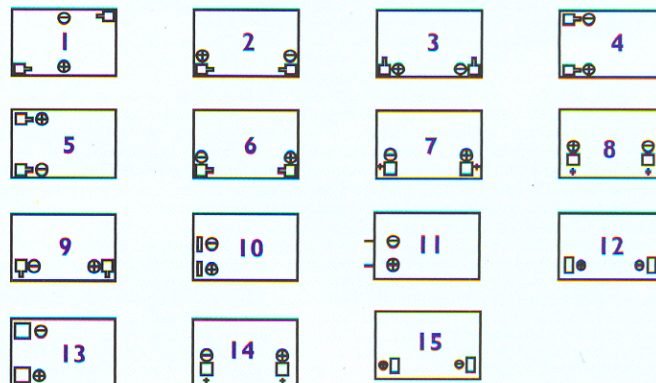

- Due to constant R&D efforts, the technical specifications are subject to change.
- STATUTORY REQUIREMENT: AS PER LAW, IT IS MANDATORY TO RETURN THE USED BATTERY TO THE MANUFACTURER/DEALER.



AUTHORIZED C & F / DISTRIBUTOR

M/S.DYNA HITECH POWER SYSTEMS LTD.

DYNA HOUSE, STREET - 1, PLOT A - 57, M.I.D.C. ANDHERI (EAST), MUMBAI - 400 093. INDIA.

TEL : 022 - 2832 8551, 2837 8009, 2822 9281

FAX : 022 - 2836 4689.

E-MAIL : dynahpsl@vsnl.com